
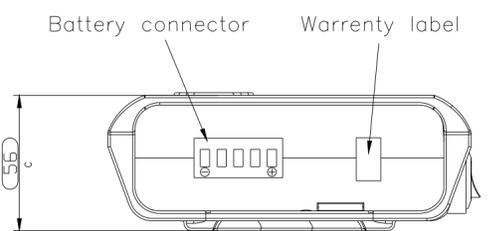
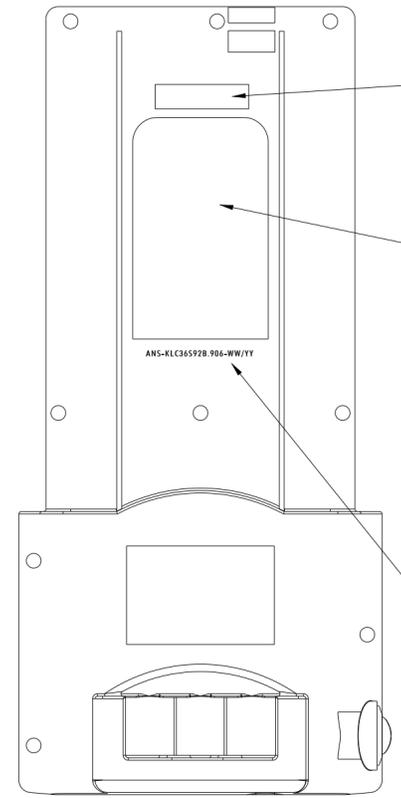
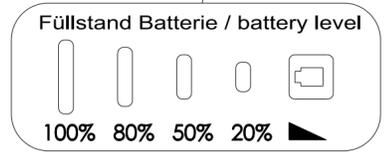



The supplier acknowledges that, with the acceptance of the drawing, he is in a position to manufacture the illustrated part in accordance with the drawing in reproducible form and series production. Through the selected manufacturing processes no impairments will arise in the material and structure which could subsequently lead to an impairment of the component. Verbal agreements over and above that are not valid. Deviations from this rule must be written and signed by the purchaser.

This drawing may not be copied, reproduced or made available to other parties in any medium without the written approval of the manufacturer.


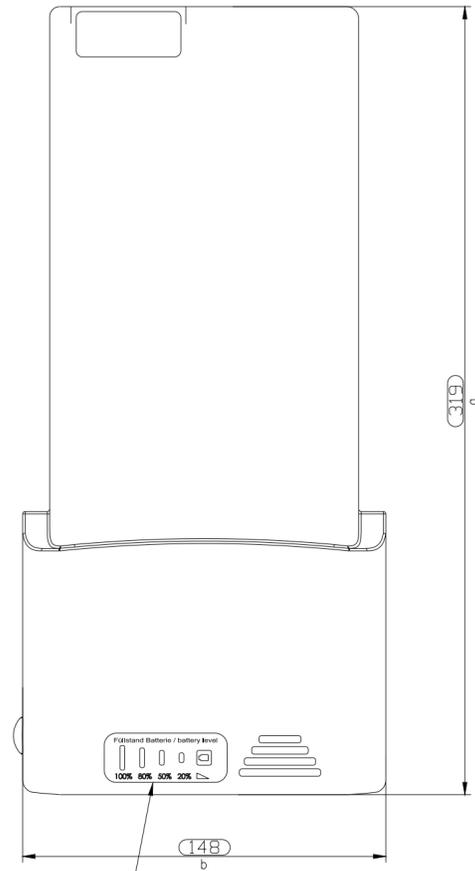


EAN code (GTIN):

4 013674 185894 -XXXX

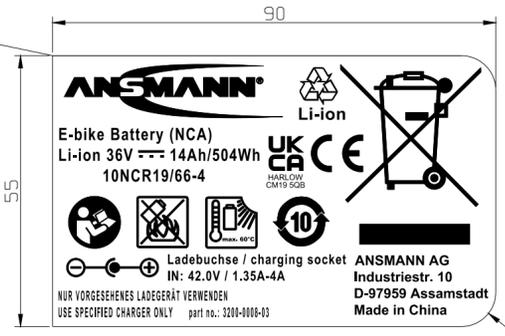

Code printing:
ANS-KLC36S92B.906-WW/YY

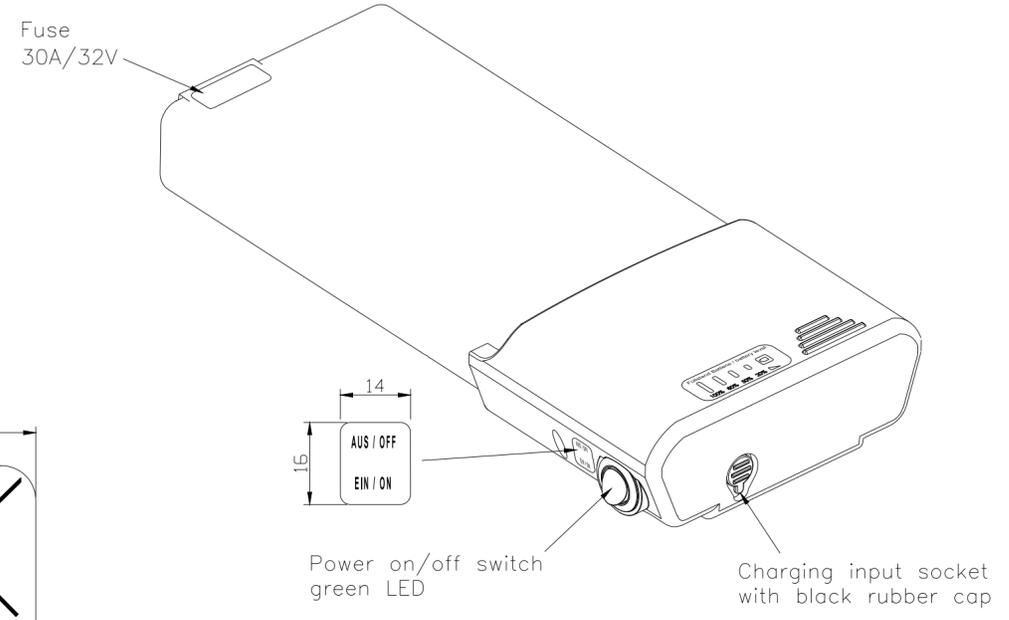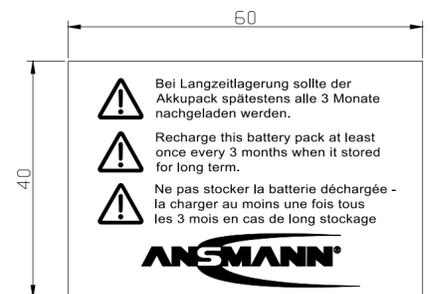

- Battery pack:
- Rated voltage: 36 V
 - Typical capacity: 14000 mAh (504Wh)
 - Minimum capacity: 13400 mAh (0,2C charging & 0,2C discharging)
 - Standard charge: 1350 mA with 42V
 - Quick charge current: 4000 mA with 42V
 - Standard discharge: 2680 mA (discharge end of 30V)
 - Maximum discharge current: 13000 mA
 - Maximum charging voltage: 42,5 V
 - Battery pack colour: Black
 - PCM Feature: Overcharge, Secondary protection, Overdischarge, Over current protection, Cell balancing, Temperature protection
 - Material of Case: Plastic (ABS+PC UL V-0VA)
 - Operating temperature: 0 - 45 °C (standard charge)
 10 - 45 °C (quick charge)
 -20 - 60 °C (standard discharge)
 - Storage temperature: -20 - 50 °C (1 week)
 -20 - 45 °C (1 month)
 -20 - 40 °C (6 months)
 -20 - 35 °C (1 year)
 - Weight: 2500 g

Cell Model: PANASONIC NCR 18650 GA (NCA)
 Cell Size: 18650
 Cell Typical capacity: 3500 mAh
 Cell Minimum capacity: 3350 mAh
 Number of cell used: 4P10S (40PCS)

		Allowable deviation general tolerances		Surface:	Material:	Weight
		DIN ISO 2768-m			Scale (DIN A2): 1:1	1
		Date	Name	Product name:		
		29.06.2021	DS	Battery-Li-Ion-36V-14Ah-black-NCR-GA		
		Changed by		Part number		Project:
				3200-0008-03		IS-XXXXX
V3	EAN Code changed	14.10.2022	DS	ANSMANN		Application range for inquiry XXX/XX
V3	EAN Code & code printing changed	16.02.2022	DS			
V2	technical data & label modified	14.02.2022	DS			
V1	Label modified	13.07.2021	LT			Sheet 1/1
Version	Change	Date	Name			