



Produktname | *Product name*: IN-Car Charger 248

Artikelnummer | *Part Number*: 1000-0020

Ersteller / Datum | *Creator / Date*: DE / 26.10.2017

Version	Change	Date	Name
VA	--- (Preliminary)	XX.XX.XXXX	XX


Template name: USB-cable , Template version: V0

Technische Daten des Adapters / technical data of the adapter:



Eingang / Primär:		input / primary:	
Spannung	12-24V DC	voltage	12-24V DC
Strom	max. 2500 mA	current	max. 2500 mA
Ausgang / Sekundär:		output / secondary:	
Spannung	5.0V DC $\pm 5\%$	voltage	5.0V DC $\pm 5\%$
Strom (Port)	max. 4800mA (2400mA)	current (Port)	max. 4800mA (2400mA)
Leistung	24W	power	24W
USB Port	2 x Type A USB	USB port	2 x Type A USB
USB Beschaltung	smart IC	USB resistor network	smart IC
Schutzbeschaltung	Kurzschlusschutz Überspannungsschutz Verpolschutzschutz	protection circuit	short circuit protection over voltage protection wrong polarity protection
Gehäuse	KFZ-Steckergehäuse, schwarz	case	car lighter plug black
Gehäusematerial	UL94V-0	housing material	UL94V-0
Betriebstemperatur	0°C.....+40°C	operating temperature	0°C.....+40°C
Approbation	CE	approval	CE
Gewicht ohne Verpackung	22g	weight without package	22g
Verpackung	Farbige Faltschachtel	package	color box

2D Zeichnung / Drawing:

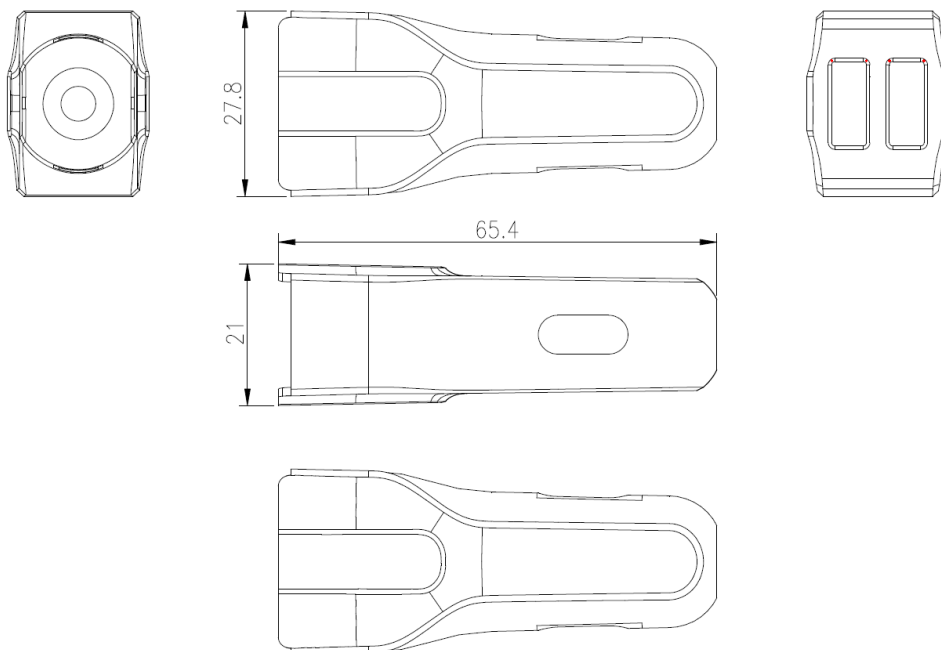

Allowable deviation / general tolerances DIN ISO 2768-c