




Produktname | *Product name*: T500F
 Artikelnummer | *Part Number*: 1600-0203
 Anfragenummer | *Inquiry Number*: AN201531
 Ersteller / Datum | *Creator / Date*: LHE / 2018-02-21

Version	Change	Date	Name
V1	LED changed	2021-12-09	DC
V0	---	2018-02-21	LHE

Template name: Light (Non-Rechargeable), Template version: V14

Leuchte / light

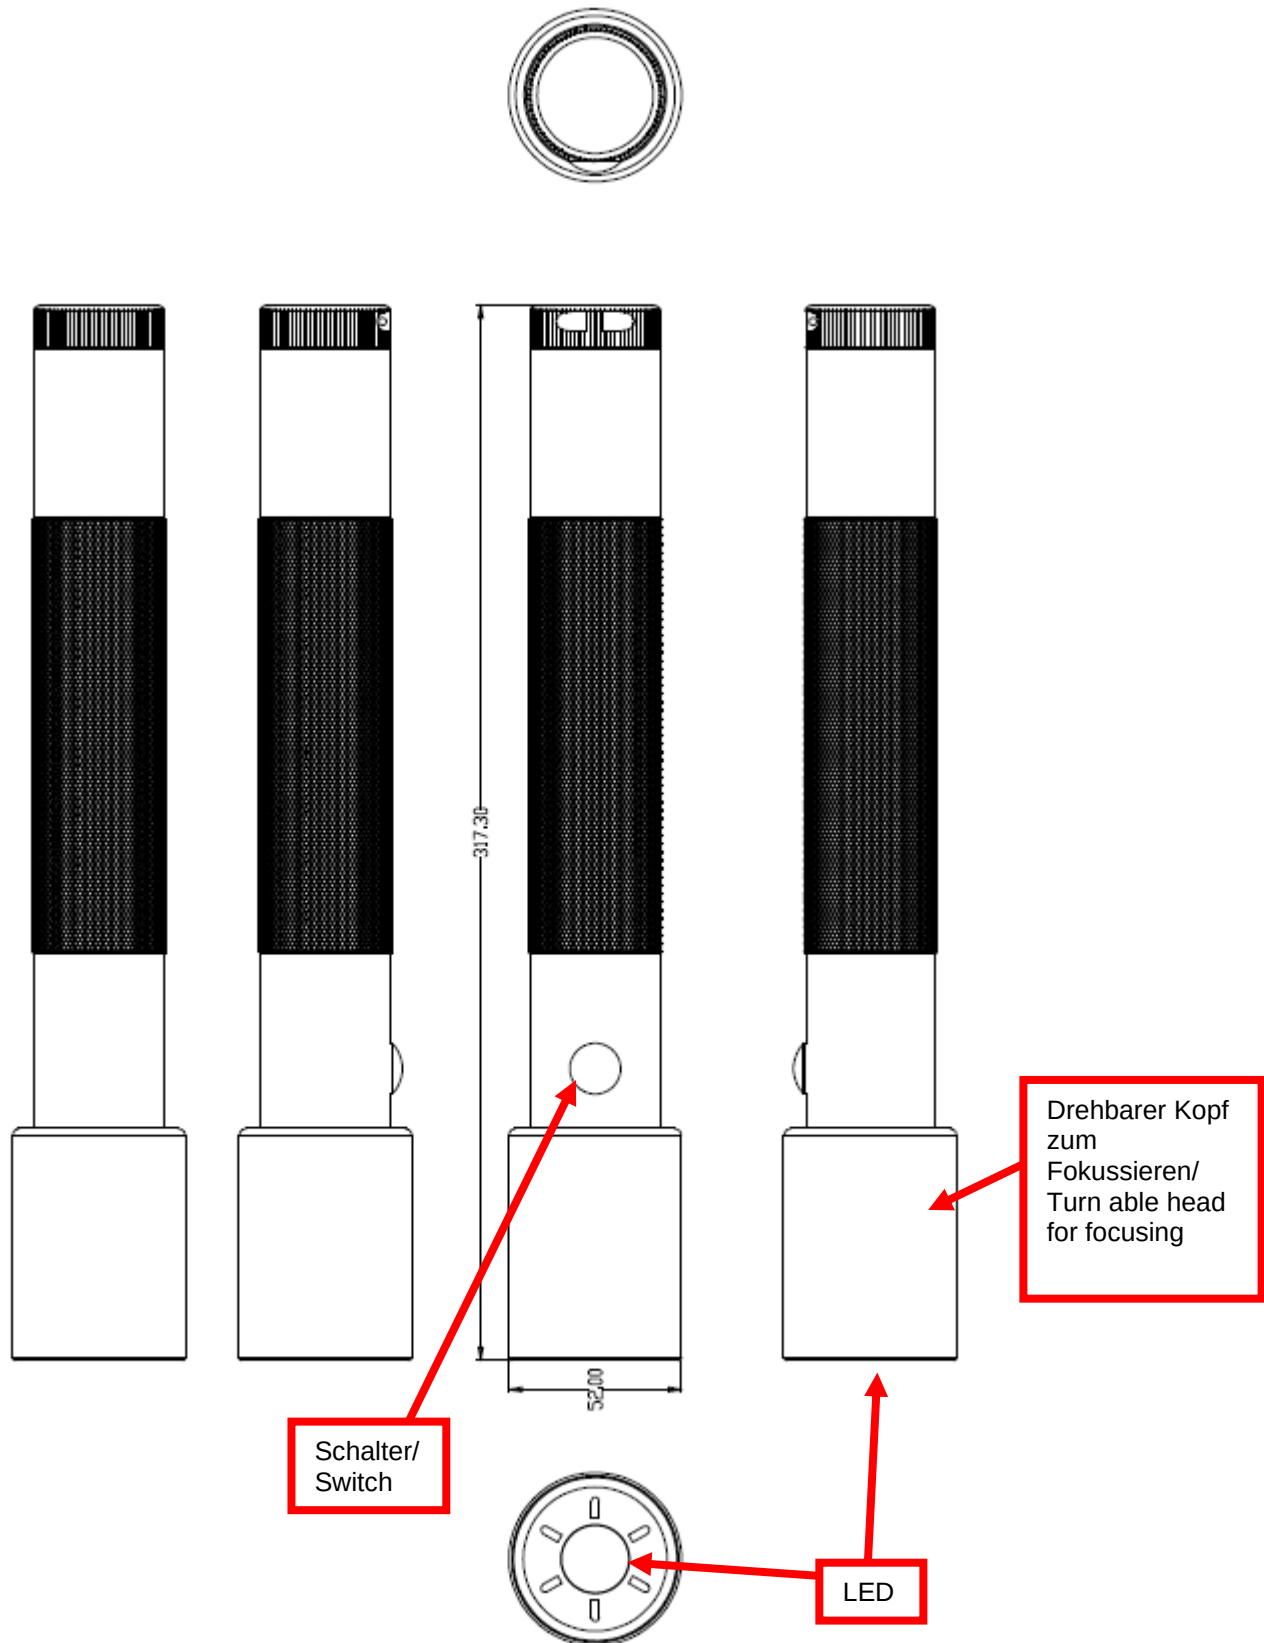

Allowable deviation / general tolerances DIN ISO 2768-c

Technische Daten der Leuchte / Technical data of the light:



Haupt-LED-Leuchtmittel:	Osram P9 LED (10W)		Main LED illuminant:	Osram P9 LED (10W)	
Optisches System der Haupt-LED	Fokussierbar		Optical system of main LED	Focus able	
Optisches System	Konvexlinse		Optical system	convex lens	
Schalterfunktion:	1. 100% LED Leistung		Switch function:	1. 100% LED power	
	2. Aus			2. Off	
	3. 40% LED Leistung			3. 40% LED power	
	4. Aus			4. Off	
Lichtstrom: [Lumen]	ca. 970lm	ca. 300lm	Luminous flux (light output): [Lumen]	approx. 970lm	ca. 300lm
Leuchtdauer:	ca. 24h	ca. 42h	Run time:	approx. 24h	ca. 42h
Leuchtweite:	ca. 195m	ca. 99m	Beam distance:	approx. 195m	ca. 99m
Maximale Beleuchtungsstärke: [Lux]	ca. 9471lx (Abstand: 1m)	ca. 2466lx (Abstand: 1m)	Peak beam illuminance: [Lux]	approx. 9471lx (Distance: 1m)	ca. 2466lx (Abstand: 1m)
Risikogruppe (EN 62471; Bewertet nach DIN IEC/TR 62778 Anhang C.2)	2		Risk group (EN 62471; Assessed with TR 62778 Annex C.2)	2	
Geeignete Batterietypen:	3x Mono D 1.5V Batterien (Alkaline; LR20/AM-1/MN1300)		Suitable batteries types:	3 x Mono D 1.5V batteries (Alkaline; LR20/AM-1/MN1300)	
Sichere Fallhöhe	1m		Safe drop height	1m	
Gehäusematerial:	Aluminium		Housing material:	Aluminium	
Betriebstemperatur:	-10°C...25°C		Operating temperature:	-10°C...25°C	
Lagertemperatur:	-10°C...50°C (Nur Alkaline Batterie/Batterien) -20°C...70°C (Nur Lampe)		Storage temperature:	-10°C...50°C (Alkaline battery/batteries only) -20°C...70°C (Torch only)	
Empfohlene Lagerbedingungen: (Nur Alkaline Batterien)	Temperatur: 5..25°C Luftfeuchtigkeit: 45..75%		Recommended storage conditions: (Alkaline batteries only)	Temperature: 5...25°C Rel. humidity: 45...75 %	
Approbationen:	CE		Approvals:	CE	
Gewicht:	923 g (Lampe mit Batterien) 494 g (Lampe)		Weight:	923 g (lamp with batteries) 494 g (lamp)	
Lieferumfang:	- 3 x Batterien, wie oben beschrieben, aber mit ANSMANN Redline Label - Handschlaufe		Included in delivery:	- 3 x batteries, as described above, but with ANSMANN Redline label - Lanyard	
Verpackung:	Farbige Faltschachtel		Package:	Colorbox	